



# MSA V-SHOCK<sup>®</sup> Self-Retracting Devices



WE KNOW WHAT'S AT STAKE.

# MSA V-SHOCK Self-Retracting Devices

The MSA V-SHOCK Self-Retracting Device line will deliver simple solutions safety managers need and provide end users the confidence needed to do their job without thinking about their PPE. Focused on ease of use, the V-SHOCK Device uses color coding and icons to communicate critical product attributes—specifically leading edge versus non-leading edge use. The line will also feature clearance charts designed for ease of understanding.

User-focused design elements make the V-SHOCK Self-Retracting Device products easier to use. The leading edge (LE) web PFL allows users to get the job done while working in leading edge scenarios with a product designed to perform in some of the most rigorous environments. Additionally, the LE web PFL bracket design balances the PFLs on the user's back to allow for easier jobsite use.

## Color Coding & Iconography

Make product selection quick and easy



Green Housing  
(Leading Edge)




Leading Edge Icon



V-SHOCK Edge  
Leading Edge PFLs

## Dashboard Labels

Deliver critical information at a glance

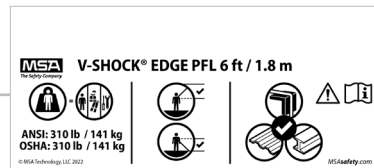


Leading Edge Label

## Clearance Charts

Designed for ease of understanding

Leading Edge Clearance Chart



## MEWP approved

DIN 19427 certified for use in mobile elevated work platforms, aerial lifts, and bucket trucks



V-SHOCK Edge  
Leading Edge SRLs






## V-SHOCK Edge Leading Edge SRLs & PFLs

V-SHOCK Edge Leading Edge Galvanized Steel Cable SRL			
Part Number	Type	Length	Snaphook
VSLEG-061-NE-E	V-SHOCK Edge	6 m (20 ft)	36CS
VSLEG-101-NE-E	V-SHOCK Edge	10 m (30 ft)	36CS
VSLEG-151-NE-E	V-SHOCK Edge	15 m (50 ft)	36CS

V-SHOCK Edge 1.8 m (6 ft) Leading Edge Web PFL			
Part Number	Type	Single/Twin	Snaphook
VSLEW-011-PC-E	V-SHOCK Edge	Single	ALTAKS
VSLEW-011-PE-E	V-SHOCK Edge	Single	36CS
VSLEW-011-PM-E	V-SHOCK Edge	Single	36CLS
VSLEW-011-PH-E	V-SHOCK Edge	Single	AL36CLS
VSLEW-012-PC-E	V-SHOCK Edge	Twin	ALTAKS
VSLEW-012-PE-E	V-SHOCK Edge	Twin	36CS
VSLEW-012-PM-E	V-SHOCK Edge	Twin	36CLS
VSLEW-012-PH-E	V-SHOCK Edge	Twin	AL36CLS

V-SHOCK Edge 2.5 m (8 ft) Leading Edge Web PFL			
Part Number	Type	Single/Twin	Snaphook
VSLEW-021-PC-E	V-SHOCK Edge	Single	ALTAKS
VSLEW-021-PE-E	V-SHOCK Edge	Single	36CS
VSLEW-021-PM-E	V-SHOCK Edge	Single	36CLS
VSLEW-021-PH-E	V-SHOCK Edge	Single	AL36CLS
VSLEW-022-PM-E	V-SHOCK Edge	Twin	36CLS
VSLEW-022-PH-E	V-SHOCK Edge	Twin	AL36CLS

## Connectors

	
36CS Steel 21 mm Gate	36CLS Steel 50 mm Gate
	
ALTAKS Aluminium Triple lock 19 mm Gate	AL36CLS Aluminium 60 mm Gate
	
Locking Pin Connector	

Performance Specifications	
<b>STANDARDS &amp; CAPACITY*</b>	
EN 360	60-141 kg (130-310 lb)
DIN 19427	
<b>MAXIMUM ARREST FORCES</b>	
PEAK	470 kg (1,029 lb.)
AVERAGE	366 kg (800 lb.)

Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice. MSA is a registered trademark of MSA Technology, LLC in the US, Europe, and other Countries. For all other trademarks visit <https://us.msasafety.com/Trademarks>.

MSA operates in over 40 countries worldwide. To find an MSA office near you, please visit [MSAsafety.com/offices](https://us.msasafety.com/offices).